

N-Uface 602







Finger



RFID



Battery (Optional)



WiFi



GPRS/GPS (Optional)



Access Control

Multi-Bio Attendance and Access Control System

Storage Capacity

Face Capacity	3000
Finger Capacity	10,000
Card Capacity	10,000
Max User	10,000
Log Capacity	2,00,000

Features

World-class Face Identification Technology

High-Speed and Accurate Fingerprint Identification

Face, Fingerprint, Card, Passward authentication

1 output relay for door open.

Good adaptation for dry, moist and rough fingerprints.

Not necessary of bright lights during scans.

supremely low Electric energy consumption.

Comprehensive SDK is available for development & integration.




N-Uface 602

Communication Interface

Communication	TCP/IP, Wi-Fi, RS 232/485, USB
---------------	--------------------------------

Biometric

Push Data	Yes
4G GPRS / GPS	Yes (Optional)
Sensor type	500 DPI
FAR	0.01%
FRR	0.001%
Processor	1 GHz High Speed CPU
OS	Linux
Verification time	<=1 second
RF card options	Proximity / Mifare (Optional)

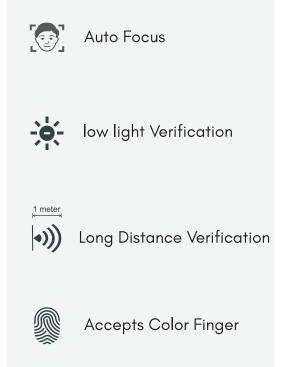

Audio/Visual

Display	4.3" IPS LCD Touch screen
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Software Desktop, Web, Cloud

Access control

Wiegand	Input / Output
Relay	Yes
Standard Functions	Anti-passback, Auto Status,
	Record Query, T9 Input, 14 Digit User ID
Support	N-FR12, KR26E, Remote,
	Push Button, No Touch



Time Attendance



Access Control



Employee Self Service



Mobile App

Power & Environment

Battery	Yes (Optional)
Operating Temperature	0°c ~ 50°c
Power	12V DC / 2A
Dimension (L*H*W)	195 x 150 x 100 mm

Disclaimer: Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.







Connect with us on







